

UR3e

UR5e

UR10e

UR16e

Specifications

Payload	3 kg (6.6 lbs)	5 kg (11 lbs)	10 kg (22 lbs)	16 kg (35.3 lbs)
Reach	500 mm (19.7 in)	850 mm (33.5 in)	1300 mm (51.2 in)	900 mm (35.4 in)
Degrees of freedom	6 rotating joints			
Programming	12 inch touchscreen with polyscope graphical user interface			

Performance

Power, Consumption, Maximum Average	300 W	570 W	615 W	585 W
Power, Consumption, Typical with moderate operating settings (approximate)	100 W	200 W	350 W	350 W

Safety	17 configurable safety functions			
--------	----------------------------------	--	--	--

Certifications	EN ISO 13849-1, PLd Category 3, and EN ISO 10218-1			
----------------	--	--	--	--

Force Sensing, Tool Flange	Force, x-y-z	Torque, x-y-z	Force, x-y-z	Torque, x-y-z	Force, x-y-z	Torque, x-y-z	Force, x-y-z	Torque, x-y-z
Range	30.0 N	10.0 Nm	50.0 N	10.0 Nm	100.0 N	10.0 Nm	160.0 N	10.0 Nm
Precision	2.0 N	0.1 Nm	3.5 N	0.2 Nm	5.0 N	0.2 Nm	5.0 N	0.2 Nm
Accuracy	3.5 N	0.1 Nm	4.0 N	0.3 Nm	5.5 N	0.5 Nm	5.5 N	0.5 Nm

Movement

Pose Repeatability per ISO 9283	± 0.03 mm	± 0.03 mm	± 0.05 mm	± 0.05 mm
---------------------------------	-----------	-----------	-----------	-----------

Axis movement	Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed
Base	± 360°	± 180°/s	± 360°	± 180°/s	± 360°	± 120°/s	± 360°	± 120°/s
Shoulder	± 360°	± 180°/s	± 360°	± 180°/s	± 360°	± 120°/s	± 360°	± 120°/s
Elbow	± 360°	± 180°/s	± 360°	± 180°/s	± 360°	± 180°/s	± 360°	± 180°/s
Wrist 1	± 360°	± 360°/s	± 360°	± 180°/s	± 360°	± 180°/s	± 360°	± 180°/s
Wrist 2	± 360°	± 360°/s	± 360°	± 180°/s	± 360°	± 180°/s	± 360°	± 180°/s
Wrist 3	Infinite	± 360°/s	± 360°	± 180°/s	± 360°	± 180°/s	± 360°	± 180°/s

Typical TCP speed	1 m/s (39.4 in/s)			
-------------------	-------------------	--	--	--

Features

IP classification	IP54			
-------------------	------	--	--	--

ISO 14644-1 Class Cleanroom	5			
-----------------------------	---	--	--	--

Noise	Less than 60 dB(A)	Less than 65 dB(A)	Less than 65 dB(A)	Less than 65 dB(A)
-------	--------------------	--------------------	--------------------	--------------------

Robot mounting	Any Orientation			
----------------	-----------------	--	--	--

I/O ports				
Digital in	2			
Digital out	2			
Analog in	2			

Tool I/O Power Supply Voltage	12/24 V			
-------------------------------	---------	--	--	--

Tool I/O Power Supply	600 mA	1.5 A (Dual pin) 1 A (Single pin)	2 A (Dual pin) 1 A (Single pin)	2 A (Dual pin) 1 A (Single pin)
-----------------------	--------	-----------------------------------	---------------------------------	---------------------------------

Physical

Footprint	Ø 128 mm	Ø 149 mm	Ø 190 mm	Ø 190 mm
-----------	----------	----------	----------	----------

Materials	Aluminium, Plastic, Steel			
-----------	---------------------------	--	--	--

Tool (end-effector) connector type	M8 M8 8-pin			
------------------------------------	---------------	--	--	--

Cable length robot arm	6 m (236 in)			
------------------------	--------------	--	--	--

Weight including cable	11.2 kg (24.7 lbs)	20.6 kg (45.4 lbs)	33.5 kg (73.9 lbs)	33.1 kg (73 lbs)
------------------------	--------------------	--------------------	--------------------	------------------

Operating Temperature Range	0-50°C			
-----------------------------	--------	--	--	--

Humidity	90%RH (non-condensing)			
----------	------------------------	--	--	--

TECHNICAL DETAILS

OEM Control Box

Features

IP classification	Not rated
-------------------	-----------

ISO 14644-1 Class Cleanroom	Not rated
-----------------------------	-----------

Operating Temperature Range	0-50°C
-----------------------------	--------

I/O ports	
Digital in	16
Digital out	16
Analog in	2
Analog out	2
Quadrature Digital Inputs	4

I/O power supply	24V 2A
------------------	--------

Communication	500 Hz Control frequency Modbus TCP PROFINET Ethernet/IP USB 2.0, USB 3.0
---------------	---

Input Voltage	AC Model: 100-240 VAC, 47-440Hz DC Model: 24-48 VDC (typical)
---------------	--


Humidity	90%RH (non-condensing)
----------	------------------------

Physical

OEM Control Box size (WxHxD)	451 mm x 168 mm x 150 mm (17.8 in x 6.6 in x 5.9 in)
------------------------------	---

Weight	AC Model: 4.7 kg (10.4 lbs.) DC Model: 4.3 kg (9.5 lbs.)
--------	---

Materials	Aluminum
-----------	----------

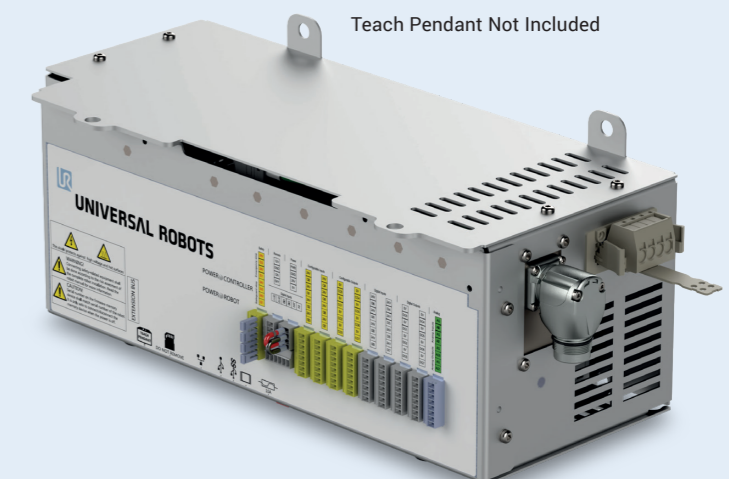

Get started with Universal Robots today

Universal Robots has more than 50+ local offices and a wide network of channel partners (distributors and system integrators) worldwide.